

Thank you for purchasing the Hardy Diesel three stage ultimate fuel filter kit. Keep in mind that any air leaks will prevent you Diesel engine from running. When priming filter loosen the plastic bowl slightly to allow air to escape while fuel is filling the bowl. This kit is supplied with a universal bracket that can be used to clamp on to the rim of a drum or can be bolted to a solid surface.




If not mounting to drum tank kit discard baking bracket and bolt angle iron to solid surface

If installing on drum tank kit Use supplied washers for spacers To adjust gap in order to clamp on to drum rim

Use supplied zip ties or safety wire to secure filter to bracket

Use Teflon tape on all threads tighten enough to prevent leakage

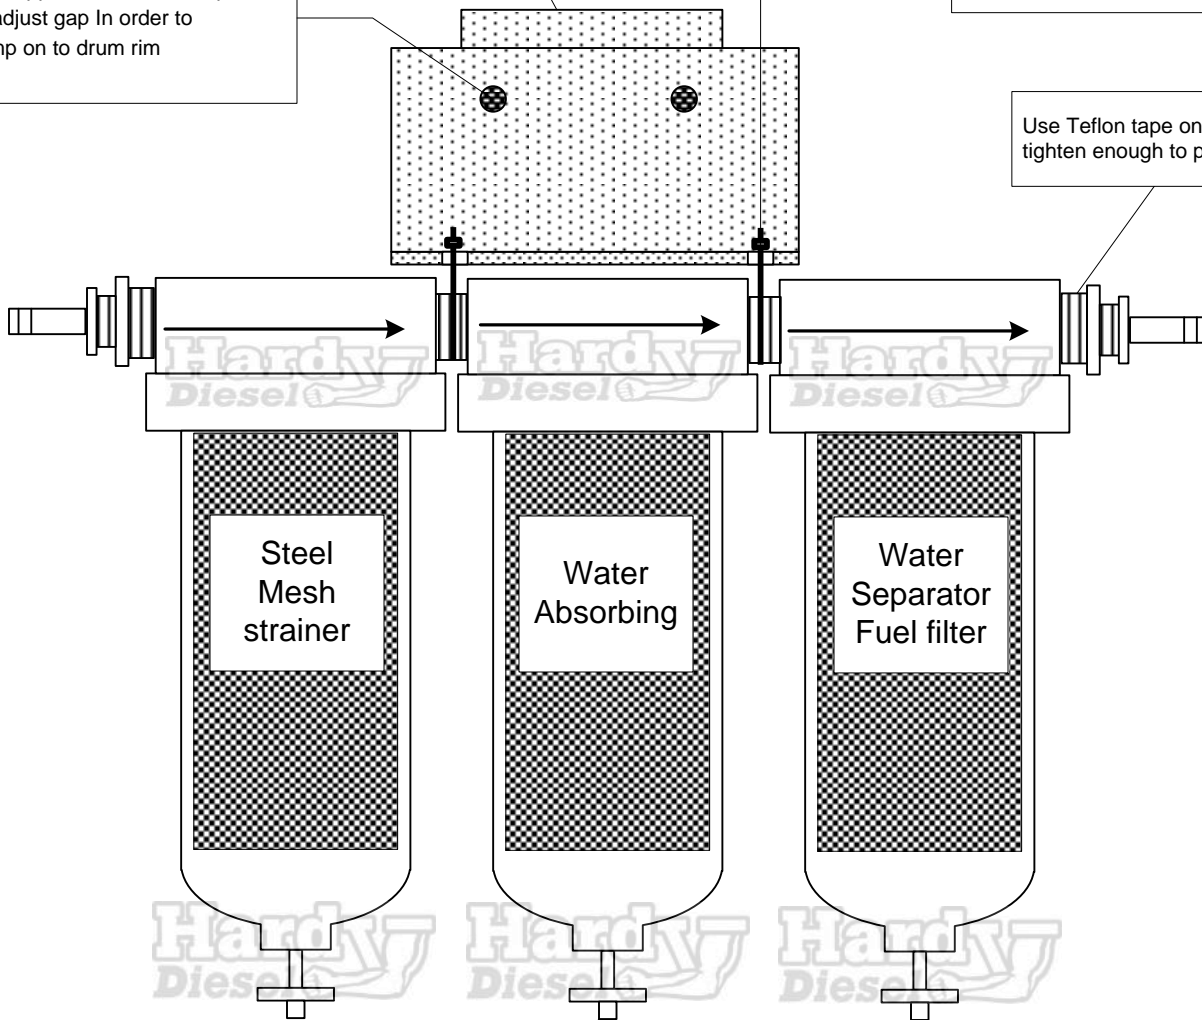

Occasionally it may be necessary to drain water here on each stage